



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7030

20 - 2700 MHz
100 WATTS
BANDED POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 7030 is a 100 W multi channel broadband system that covers the 20 – 2700 MHz frequency range with a single RF input and Single RF output port.

The system includes RF high power switches controlled by the system controller. The IEEE-488/RS232/Ethernet and/or Front panel key-pad provides full control and reduces the power consumption to the minimum by shutting down the un-selected channel.

The System is configured in a Rear panel Connectors configuration. Front Panel Connector configuration can be selected if needed (Ophir P/N 7030FE).

	Parameter	Specification @ 25° C
<u>Electrical</u>		
1	Frequency Range	20 – 2700 MHz
2	Saturated Power Output	100 Watts typ.
3	Nominal RF drive for rated power	0 dBm
4	Power Flatness	+/-2.5 dB per band
5	Input VSWR	2:1 max
6	Harmonics	-20 dBc typ. @ 60 W Pout
7	Spurious Signals	< -60 dBc typical
8	Temperature Protection	Baseplate above 80° C
9	AC Power Consumption	1,000 Watt maximum
10	AC Power Input	100-240VAC, 1Ø single Phase
11	Maximum RF Input	+3 dBm max
12	Antenna Switching time	50mS max
13	Communication	IEEE-488, RS-232, and Ethernet
<u>Mechanical</u>		
14	Dimensions	19" x 5.25 x 26"
15	Weight	50 lb. max
16	Connectors	Type-N
17	Grounding	Chassis
18	Cooling	Internal Forced Air
<u>Environmental</u>		
19	Operating Temperature	0° C to +50° C
20	Operating Humidity	95% Non-condensing
21	Operating Altitude	Up to 10,000' Above Sea Level
22	Shock and Vibration	Normal Truck transport

Specifications subject to change without notice






5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)577-9887
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7030

20 - 2700 MHz
100 WATTS
BANDED POWER RF AMPLIFIER

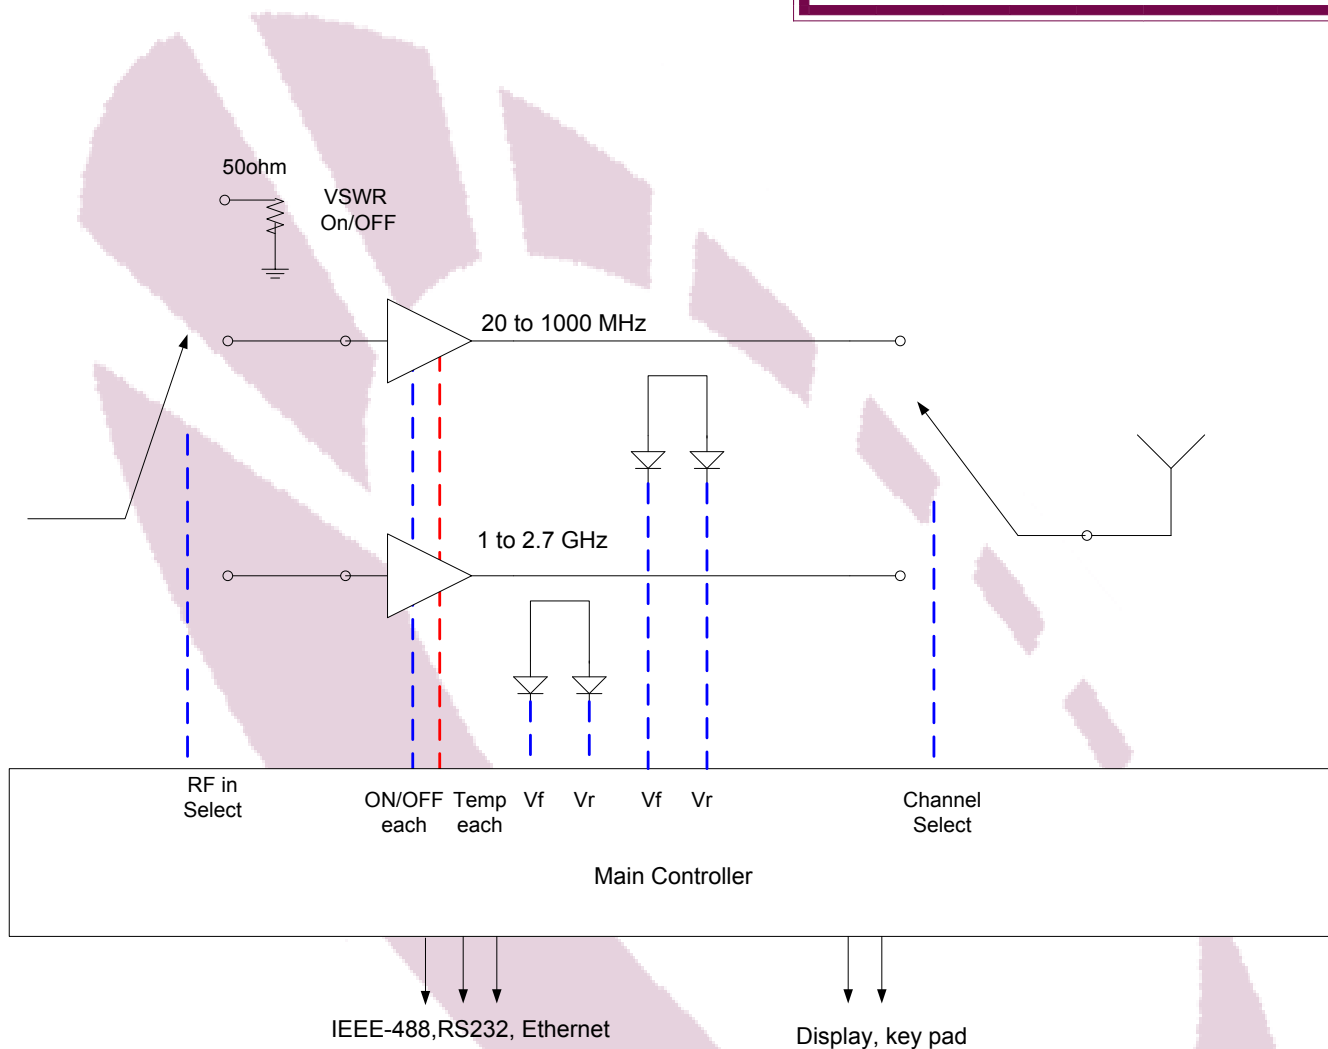

CIRCUIT PROTECTIONS

- ◇ Protection against VSWR of > 3:1 latched with Reset
- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage

CONTROL & INDICATIONS

- ◇ AC Circuit Breaker
- ◇ Band Select
- ◇ Forward power of selected channel
- ◇ Reflected Power of selected channel
- ◇ VSWR Fault Reset

