


| NO. | COMPONENTS           | IMPEDANCE |
|-----|----------------------|-----------|
| 1   | SMA MALE             | 50 OHM    |
| 2   | 5003                 | 50 OHM    |
| 3   | HEAT SHRINKING TUBE  |           |
| 4   | SMA MALE RIGHT ANGLE | 50 OHM    |

**TEST LEAD WITH EXTRA STURDY  
CABLE / CONNECTOR CONNECTION.**

SMA MALE

SMA MALE  
RIGHT ANGLE

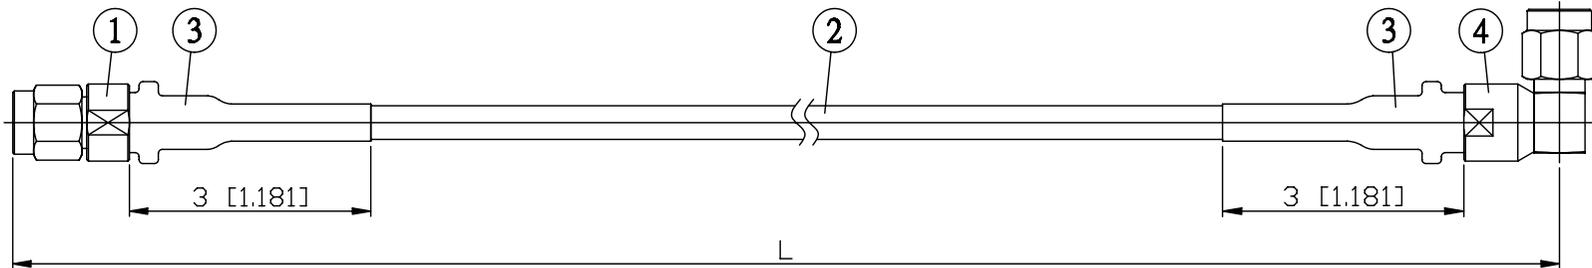

| JYE BAO P/N        | Freq. (GHz) | Max. Return Loss | L CM (INCH)         |
|--------------------|-------------|------------------|---------------------|
| A30A39-5003-18G50  | 18          | -16.5dB          | 50 (19.685)         |
| A30A39-5003-18G100 |             |                  | 100 (39.370)        |
| A30A39-5003-18G150 |             |                  | 150 (59.055)        |
| A30A39-5003-18G200 |             |                  | 200 (78.740)        |
| A30A39-5003-18GXXX |             |                  | CUSTOM LENGTH IN CM |

|  |  |
|--|--|
| LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER. | <b>JYE BAO CO., LTD.</b><br>TAIPEI TAIWAN              |
|  | DESCRIPTION<br>CABLE ASSEMBLY SMA PLUG TO SMA PLUG R/A |
|  | JYE BAO DRAWING NO.<br>A30A39-5003-18GXXX              |