


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE	50 OHM
2	5005	50 OHM
3	HEAT SHRINKING TUBE	
4	SMA MALE RIGHT ANGLE	50 OHM

**TEST LEAD WITH EXTRA STURDY  
CABLE / CONNECTOR CONNECTION.**

SMA MALE

SMA MALE  
RIGHT ANGLE

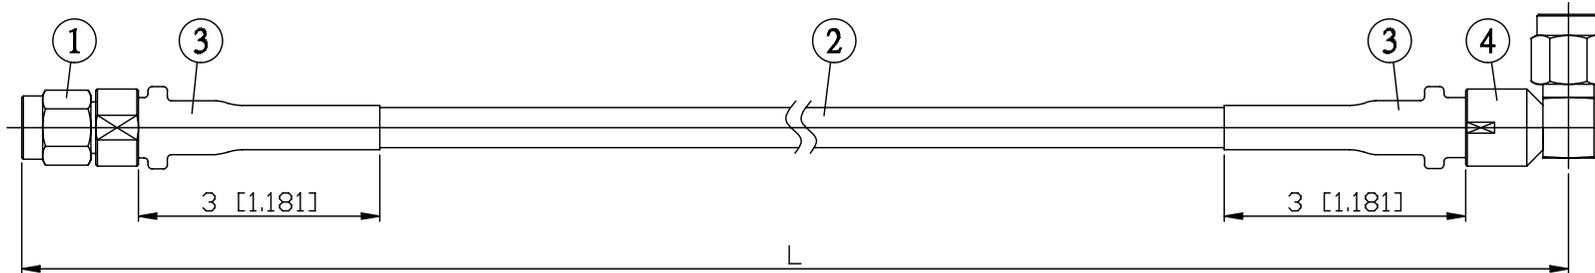

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A30A39-5005-3G50	3	-20dB	50 (19.685)
A30A39-5005-3G100			100 (39.370)
A30A39-5005-3G150			150 (59.055)
A30A39-5005-3G200			200 (78.740)
A30A39-5005-3GXXX			CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY SMA PLUG TO SMA PLUG R/A
	JYE BAO DRAWING NO. A30A39-5005-3GXXX