


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE	50 OHM
2	5003	50 OHM
3	HEAT SHRINKING TUBE	
4	SMA FEMALE FOR BULKHEAD	50 OHM


TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

SMA MALE

SMA FEMALE
FOR BULKHEAD

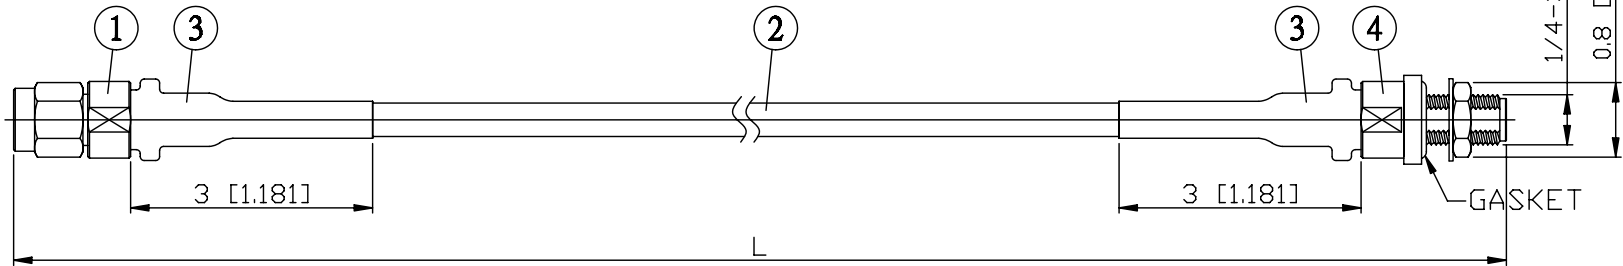

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A30A85-5003-12G50	12.4	-20dB	50 (19.685)
A30A85-5003-12G100			100 (39.370)
A30A85-5003-12G150			150 (59.055)
A30A85-5003-12G200			200 (78.740)
A30A85-5003-12GXXX			CUSTOM LENGTH IN CM



LENGTH TOLERANCE
IS $\pm 1.5\%$ OR $\pm 10\text{MM}$,
WHICHEVER IS
GREATER.

JYE BAO CO., LTD.
TAIPEI TAIWAN

DESCRIPTION CABLE ASSEMBLY SMA PLUG
TO SMA FEMALE FOR BULKHEAD

JYE BAO DRAWING NO.
A30A85-5003-12GXXX