


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE	50 OHM
2	5003	50 OHM
3	HEAT SHRINKING TUBE	
4	SMA FEMALE FOR BULKHEAD	50 OHM


TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

SMA MALE

SMA FEMALE
FOR BULKHEAD

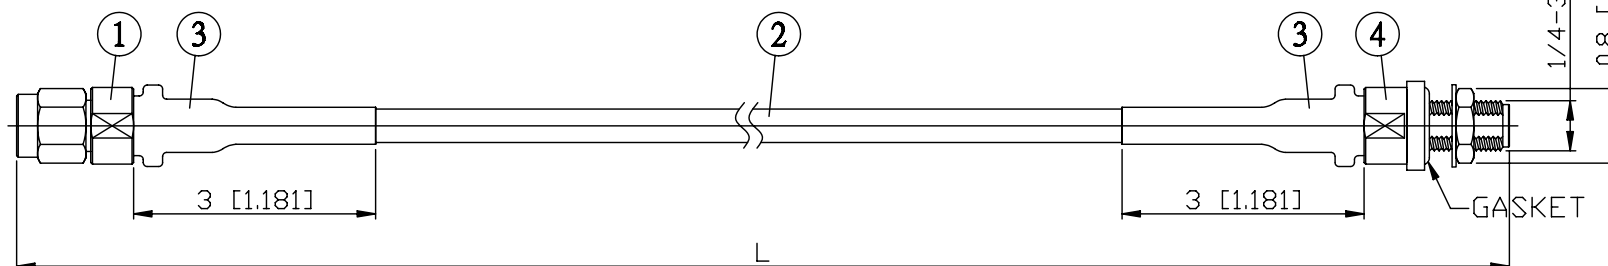

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A30A85-5003-18G50	18	-18dB	50 (19.685)
A30A85-5003-18G100			100 (39.370)
A30A85-5003-18G150			150 (59.055)
A30A85-5003-18G200			200 (78.740)
A30A85-5003-18GXXX			CUSTOM LENGTH IN CM



LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD. TAIPEI TAIWAN	
	DESCRIPTION	CABLE ASSEMBLY SMA PLUG TO SMA FEMALE FOR BULKHEAD
	JYE BAO DRAWING NO.	A30A85-5003-18GXXX