


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE	50 OHM
2	5005	50 OHM
3	HEAT SHRINKING TUBE	
4	N MALE	50 OHM

**TEST LEAD WITH EXTRA STURDY
CABLE / CONNECTOR CONNECTION.**

SMA MALE

N MALE

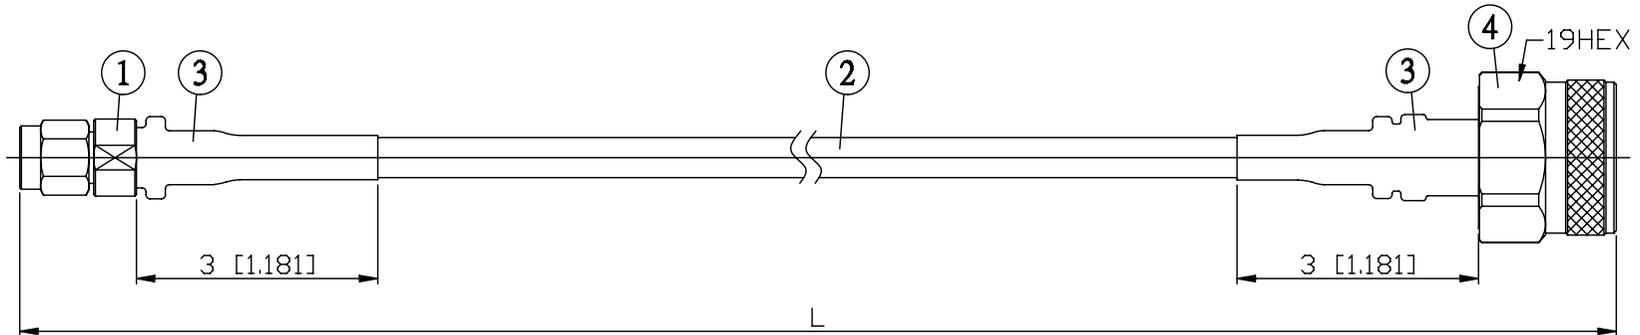

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A30N30-5005-12G50	12.4	-20dB	50 (19.685)
A30N30-5005-12G100			100 (39.370)
A30N30-5005-12G150			150 (59.055)
A30N30-5005-12G200			200 (78.740)
A30N30-5005-12GXXX			CUSTOM LENGTH IN CM

<p>LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.</p>	<p>JYE BAO CO., LTD.</p> <p>TAIPEI TAIWAN</p>
	<p>DESCRIPTION</p> <p>CABLE ASSEMBLY SMA PLUG TO N PLUG</p>
	<p>JYE BAO DRAWING NO.</p> <p>A30N30-5005-12GXXX</p>