


| NO. | COMPONENTS            | IMPEDANCE |
|-----|-----------------------|-----------|
| 1   | SMA MALE              | 50 OHM    |
| 2   | 5005                  | 50 OHM    |
| 3   | HEAT SHRINKING TUBE   |           |
| 4   | N FEMALE FOR BULKHEAD | 50 OHM    |


## TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

SMA MALE

N FEMALE  
FOR BULKHEAD

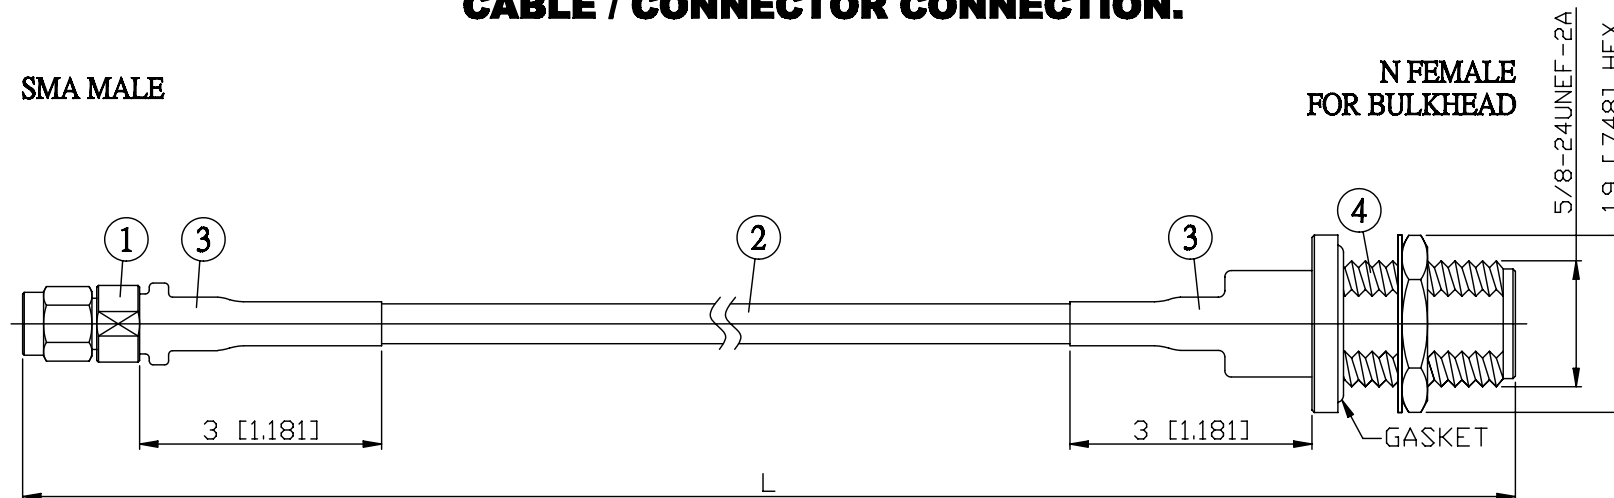

| JYE BAO P/N        | Freq.<br>(GHz) | Max.<br>Return Loss | L<br>CM (INCH)         |
|--------------------|----------------|---------------------|------------------------|
| A30N85-5005-18G50  | 18             | -18dB               | 50 (19.685)            |
| A30N85-5005-18G100 |                |                     | 100 (39.370)           |
| A30N85-5005-18G150 |                |                     | 150 (59.055)           |
| A30N85-5005-18G200 |                |                     | 200 (78.740)           |
| A30N85-5005-18GXXX |                |                     | CUSTOM<br>LENGTH IN CM |

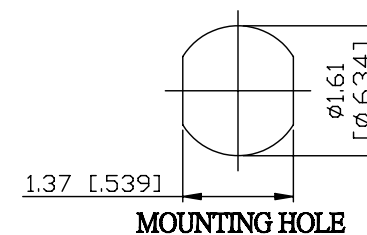

|                                                                                       |                          |                                                   |
|---------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------|
| LENGTH TOLERANCE<br>IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ ,<br>WHICHEVER IS<br>GREATER. | <b>JYE BAO CO., LTD.</b> |                                                   |
|                                                                                       | TAIPEI TAIWAN            |                                                   |
|                                                                                       | DESCRIPTION              | CABLE ASSEMBLY SMA PLUG<br>TO N JACK FOR BULKHEAD |
|                                                                                       | JYE BAO DRAWING NO.      | A30N85-5005-18GXXX                                |