


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE RIGHT ANGLE	50 OHM
2	5005	50 OHM
3	HEAT SHRINKING TUBE	
4	SMA FEMALE	50 OHM

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

SMA MALE
RIGHT ANGLE

SMA FEMALE

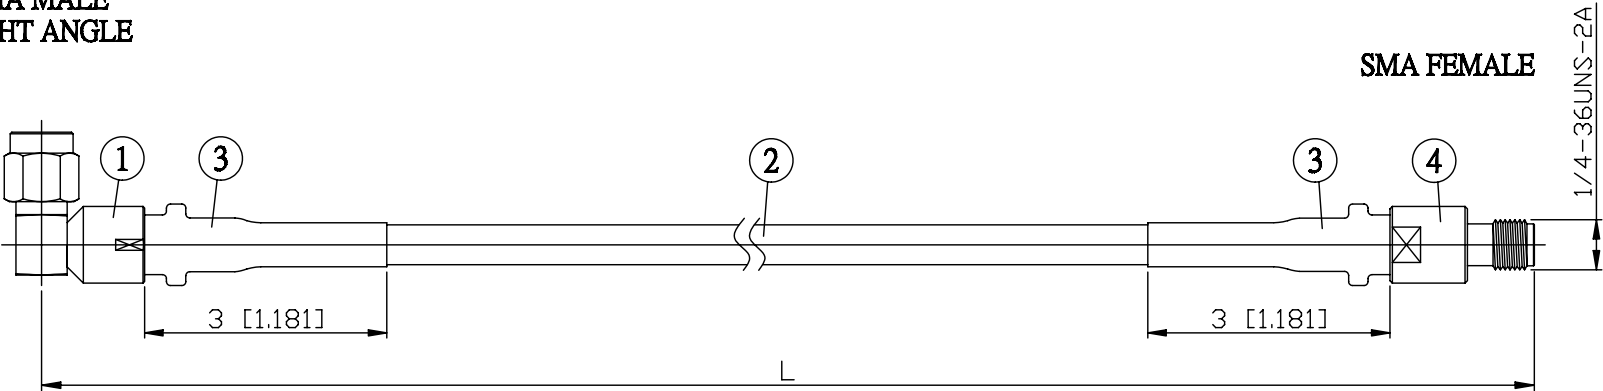

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A39A80-5005-12G50	12.4	-18dB	50 (19.685)
A39A80-5005-12G100			100 (39.370)
A39A80-5005-12G150			150 (59.055)
A39A80-5005-12G200			200 (78.740)
A39A80-5005-12GXXX			CUSTOM LENGTH IN CM

LENGTH TOLERANCE
IS $\pm 1.5\%$ OR $\pm 10\text{MM}$,
WHICHEVER IS
GREATER.

JYE BAO CO., LTD.
TAIPEI TAIWAN

DESCRIPTION
CABLE ASSEMBLY SMA PLUG R/A TO SMA JACK
JYE BAO DRAWING NO.
A39A80-5005-12GXXX