


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE RIGHT ANGLE	50 OHM
2	RG223	50 OHM
3	HEAT SHRINKING TUBE	
4	SMA FEMALE FOR BULKHEAD	50 OHM


SMA MALE
RIGHT ANGLE

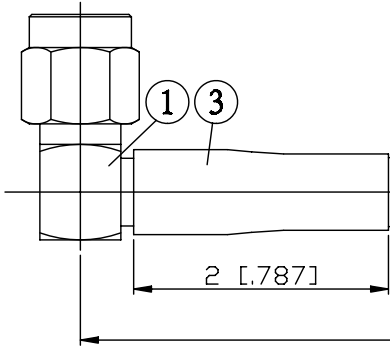


2

L


SMA FEMALE
FOR BULKHEAD

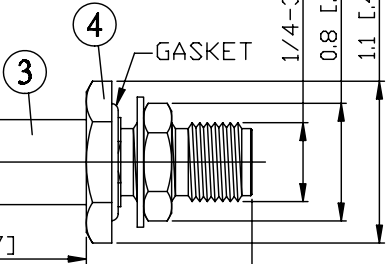

1/4-36UNS-2A
0.8 [0.315] HEX
1.1 [0.433] HEX



JYE BAO P/N	L CM (INCH)
A39A85-223-15	15 (5.906)
A39A85-223-30	30 (11.811)
A39A85-223-50	50 (19.685)
A39A85-223-100	100 (39.370)
A39A85-223-150	150 (59.055)
A39A85-223-200	200 (78.740)
A39A85-223-XXX	CUSTOM LENGTH IN CM



MOUNTING HOLE

LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	JYE BAO CO., LTD.	
	TAIPEI TAIWAN	
	DESCRIPTION	CABLE ASSEMBLY SMA PLUG R/A TO SMA JACK FOR BULKHEAD
	JYE BAO DRAWING NO.	A39A85-223-XXX