


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE RIGHT ANGLE	50 OHM
2	5002	50 OHM
3	HEAT SHRINKING TUBE	
4	3.5 FEMALE	50 OHM

**TEST LEAD WITH EXTRA STURDY  
CABLE / CONNECTOR CONNECTION.**

SMA MALE  
RIGHT ANGLE

3.5 FEMALE

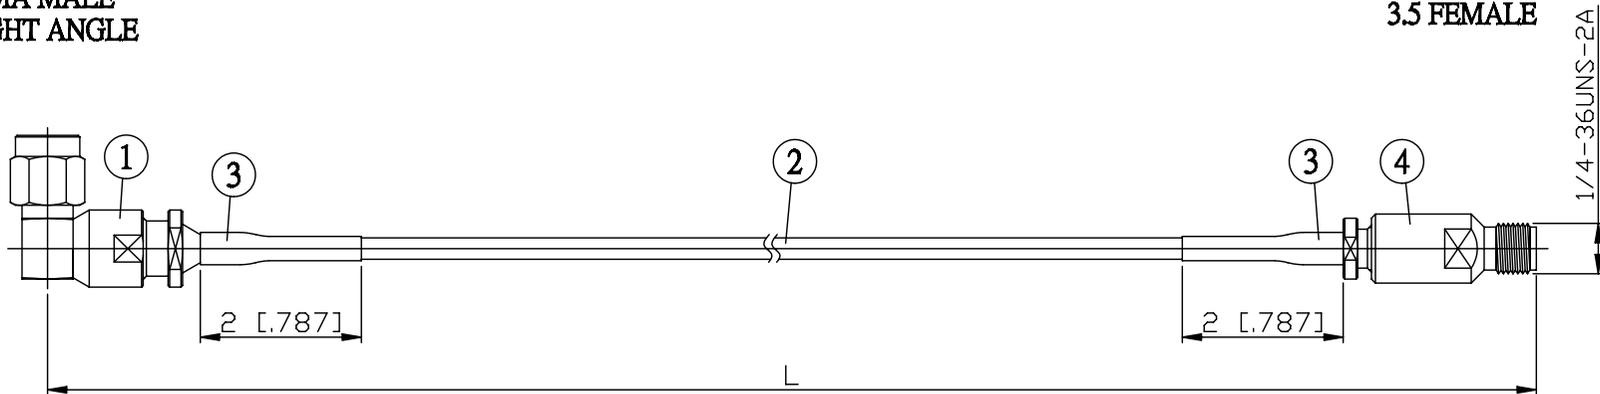

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A39PC80-5002-18G50	18	-16.5dB	50 (19.685)
A39PC80-5002-18G100			100 (39.370)
A39PC80-5002-18G150			150 (59.055)
A39PC80-5002-18G200			200 (78.740)
A39PC80-5002-18GXXX			CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY SMA PLUG R/A TO 3.5 JACK
	JYE BAO DRAWING NO. A39PC80-5002-18GXXX