


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE RIGHT ANGLE	50 OHM
2	5005	50 OHM
3	HEAT SHRINKING TUBE	
4	PC3.5 FEMALE	50 OHM

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

SMA MALE
RIGHT ANGLE

PC3.5 FEMALE

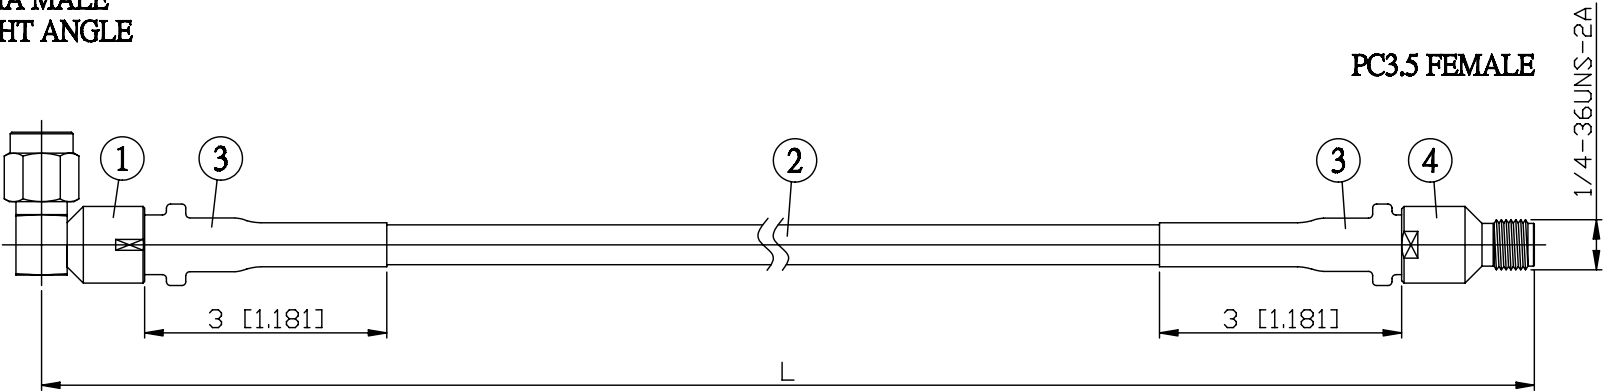

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A39PC80-5005-18G50	18	-16.5dB	50 (19.685)
A39PC80-5005-18G100			100 (39.370)
A39PC80-5005-18G150			150 (59.055)
A39PC80-5005-18G200			200 (78.740)
A39PC80-5005-18GXXX			CUSTOM LENGTH IN CM

LENGTH TOLERANCE
IS $\pm 1.5\%$ OR $\pm 10\text{MM}$,
WHICHEVER IS
GREATER.

JYE BAO CO., LTD.
TAIPEI TAIWAN

DESCRIPTION
CABLE ASSEMBLY SMA PLUG R/A TO PC3.5 JACK
JYE BAO DRAWING NO.
A39PC80-5005-18GXXX