


NO.	COMPONENTS	IMPEDANCE
1	SMA REVERSE POLARITY MALE RIGHT ANGLE	50 OHM
2	.085" HANDBENDABLE CABLE (= JYEBAO P/N .085SRF-W-P-50)	50 OHM
3	SMA FEMALE FOR BULKHEAD	50 OHM

SMA R/P MALE
RIGHT ANGLE



2


L

SMA FEMALE
FOR BULKHEAD

GASKET


3

1/4-36UNS-2A
0.8 [0.315] HEX
1.1 [0.433] HEX

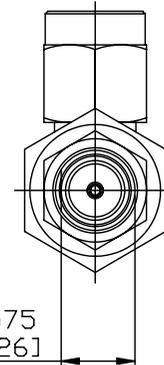

0.575
[0.226]

JYE BAO P/N	L CM (INCH)
A69A85-85S-15	15 (5.906)
A69A85-85S-30	30 (11.811)
A69A85-85S-50	50 (19.685)
A69A85-85S-100	100 (39.370)
A69A85-85S-150	150 (59.055)
A69A85-85S-200	200 (78.740)
A69A85-85S-XXX	CUSTOM LENGTH IN CM



MOUNTING HOLE

<p>LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.</p>	<p>JYE BAO CO., LTD.</p> <p>TAIPEI TAIWAN</p>
	<p>DESCRIPTION CABLE ASSEMBLY SMA R/P PLUG R/A TO SMA JACK FOR BULKHEAD</p>
	<p>JYE BAO DRAWING NO. A69A85-85S-XXX</p>