



NO.	COMPONENTS	IMPEDANCE
1	SMA REVERSE POLARITY MALE RIGHT ANGLE	50 OHM
2	DOUBLE SHIELDED RG316(= RD316)	50 OHM
3	HEAT SHRINKING TUBE	
4	SMA REVERSE POLARITY FEMALE FOR BULKHEAD	50 OHM


SMA R/P MALE
RIGHT ANGLE

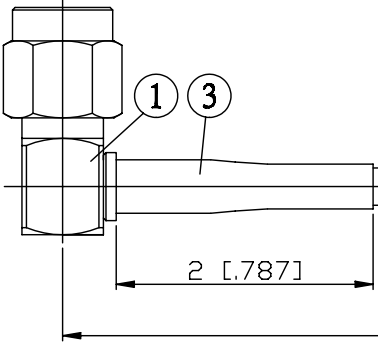

SMA R/P FEMALE
FOR BULKHEAD

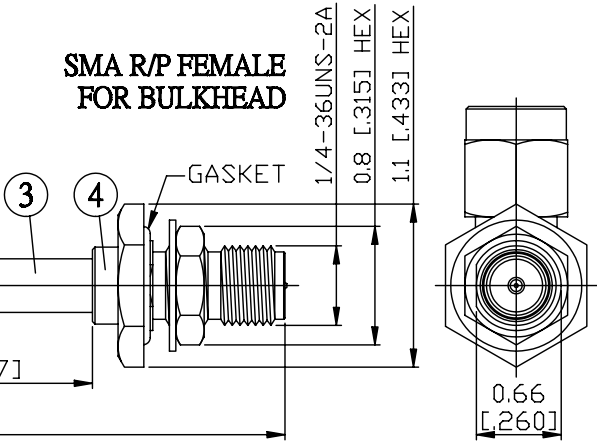

JYE BAO P/N	L CM (INCH)
A69A95-316D-15	15 (5.906)
A69A95-316D-30	30 (11.811)
A69A95-316D-50	50 (19.685)
A69A95-316D-100	100 (39.370)
A69A95-316D-150	150 (59.055)
A69A95-316D-200	200 (78.740)
A69A95-316D-XXX	CUSTOM LENGTH IN CM



MOUNTING HOLE

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD.
	TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY SMA R/P PLUG R/A TO SMA R/P JACK FOR BULKHEAD
	JYE BAO DRAWING NO. A69A95-316D-XXX