



| NO. | COMPONENTS                                           | IMPEDANCE |
|-----|------------------------------------------------------|-----------|
| 1   | SMA FEMALE FOR BULKHEAD                              | 50 OHM    |
| 2   | .085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405) | 50 OHM    |
| 3   | BNC MALE RIGHT ANGLE                                 | 50 OHM    |

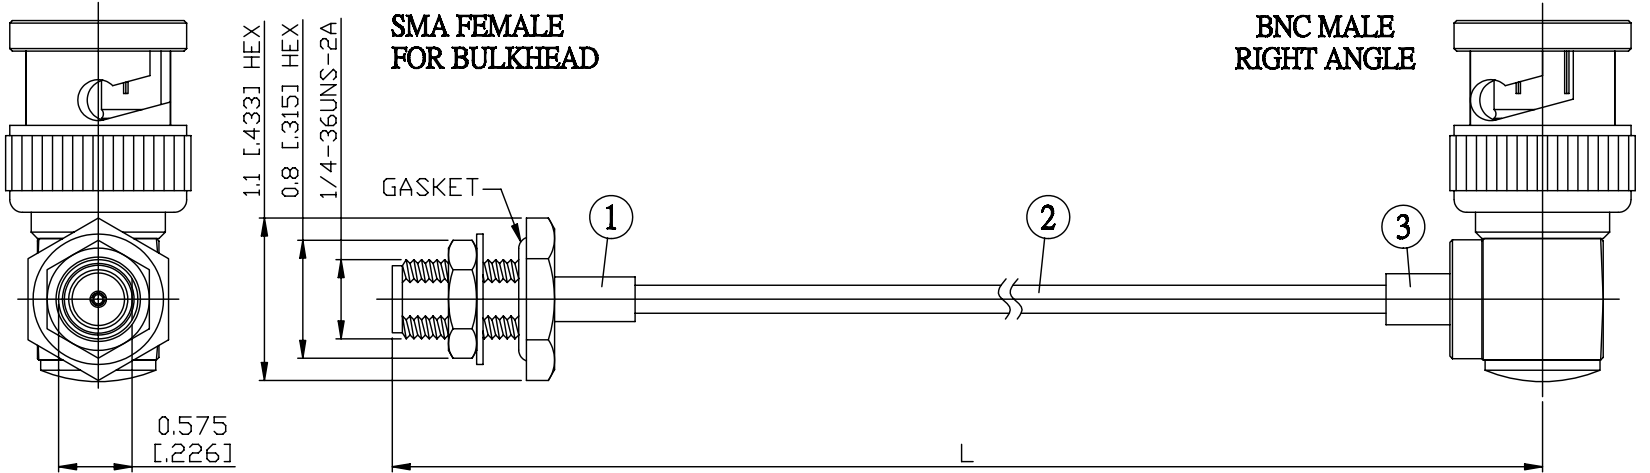

| JYE BAO P/N    | L<br>CM (INCH)         |
|----------------|------------------------|
| A85B39-85T-15  | 15 (5.906)             |
| A85B39-85T-30  | 30 (11.811)            |
| A85B39-85T-50  | 50 (19.685)            |
| A85B39-85T-100 | 100 (39.370)           |
| A85B39-85T-150 | 150 (59.055)           |
| A85B39-85T-200 | 200 (78.740)           |
| A85B39-85T-XXX | CUSTOM<br>LENGTH IN CM |



MOUNTING HOLE

|                                                           |                                                                  |
|-----------------------------------------------------------|------------------------------------------------------------------|
| LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER. | <b>JYE BAO CO., LTD.</b>                                         |
|                                                           | TAIPEI TAIWAN                                                    |
|                                                           | DESCRIPTION CABLE ASSEMBLY SMA JACK FOR BULKHEAD TO BNC PLUG R/A |
|                                                           | JYE BAO DRAWING NO. A85B39-85T-XXX                               |