



| NO. | COMPONENTS                                           | IMPEDANCE |
|-----|------------------------------------------------------|-----------|
| 1   | SMA FEMALE FOR BULKHEAD                              | 50 OHM    |
| 2   | .085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405) | 50 OHM    |
| 3   | SMC MALE                                             | 50 OHM    |

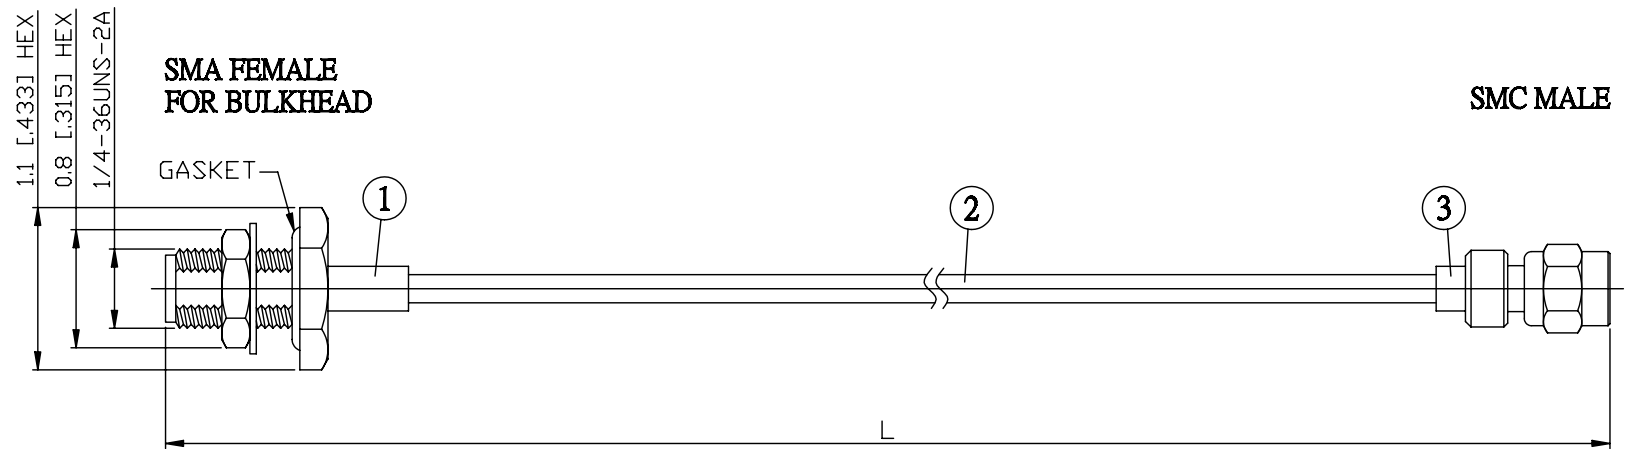

| JYE BAO P/N     | L<br>CM (INCH)         |
|-----------------|------------------------|
| A85MC30-85T-15  | 15 (5.906)             |
| A85MC30-85T-30  | 30 (11.811)            |
| A85MC30-85T-50  | 50 (19.685)            |
| A85MC30-85T-100 | 100 (39.370)           |
| A85MC30-85T-150 | 150 (59.055)           |
| A85MC30-85T-200 | 200 (78.740)           |
| A85MC30-85T-XXX | CUSTOM<br>LENGTH IN CM |



|                                                                                       |                          |                                                     |
|---------------------------------------------------------------------------------------|--------------------------|-----------------------------------------------------|
| LENGTH TOLERANCE<br>IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ ,<br>WHICHEVER IS<br>GREATER. | <b>JYE BAO CO., LTD.</b> |                                                     |
|                                                                                       | TAIPEI TAIWAN            |                                                     |
|                                                                                       | DESCRIPTION              | CABLE ASSEMBLY SMA JACK<br>FOR BULKHEAD TO SMC PLUG |
|                                                                                       | JYE BAO DRAWING NO.      | A85MC30-85T-XXX                                     |