



| NO. | COMPONENTS                        | IMPEDANCE |
|-----|-----------------------------------|-----------|
| 1   | SMA FEMALE FOR BULKHEAD           | 50 OHM    |
| 2   | .047" TIN PLATED SEMI-RIGID CABLE | 50 OHM    |
| 3   | SMPM FEMALE RIGHT ANGLE           | 50 OHM    |

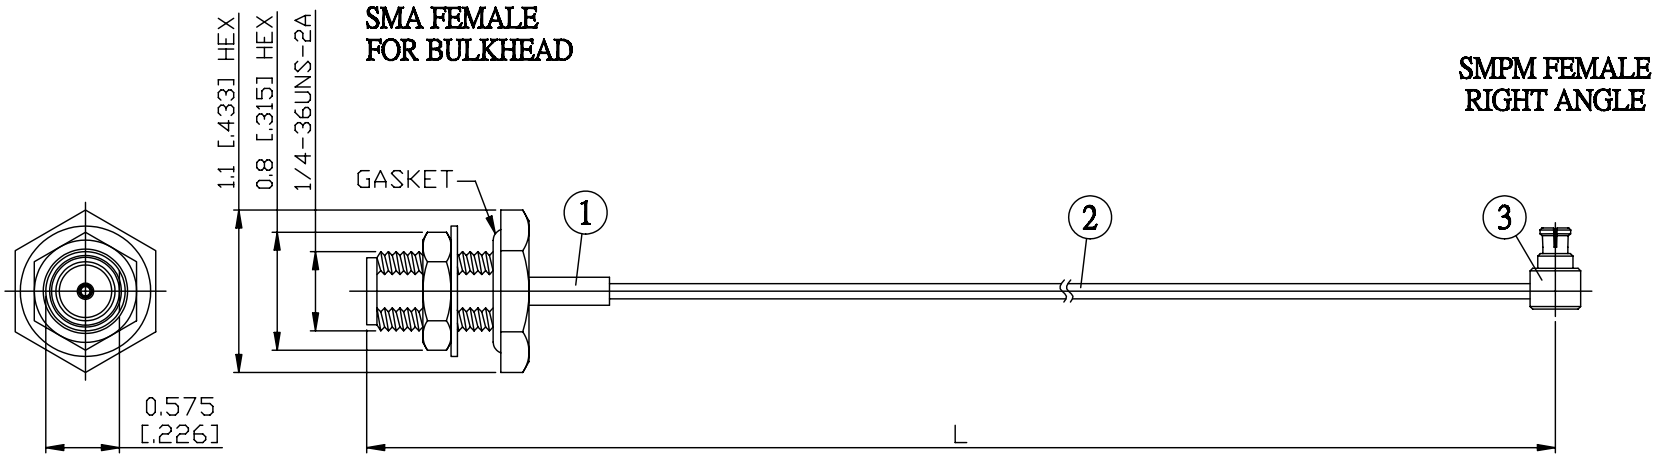

| JYE BAO P/N     | L<br>CM (INCH)         |
|-----------------|------------------------|
| A85PM89-47T-15  | 15 (5.906)             |
| A85PM89-47T-30  | 30 (11.811)            |
| A85PM89-47T-50  | 50 (19.685)            |
| A85PM89-47T-100 | 100 (39.370)           |
| A85PM89-47T-150 | 150 (59.055)           |
| A85PM89-47T-200 | 200 (78.740)           |
| A85PM89-47T-XXX | CUSTOM<br>LENGTH IN CM |



|                                                                    |                                                                      |
|--------------------------------------------------------------------|----------------------------------------------------------------------|
| LENGTH TOLERANCE<br>IS ±1.5% OR ±10MM,<br>WHICHEVER IS<br>GREATER. | <b>JYE BAO CO., LTD.</b>                                             |
|                                                                    | TAIPEI TAIWAN                                                        |
|                                                                    | DESCRIPTION CABLE ASSEMBLY SMA JACK<br>FOR BULKHEAD TO SMPM JACK R/A |
|                                                                    | JYE BAO DRAWING NO.<br>A85PM89-47T-XXX                               |