



| NO. | COMPONENTS                                                | IMPEDANCE |
|-----|-----------------------------------------------------------|-----------|
| 1   | SMA FEMALE FOR BULKHEAD                                   | 50 OHM    |
| 2   | .085" HANDBENDABLE CABLE<br>(= JYEBAO P/N .085SRF-W-P-50) | 50 OHM    |
| 3   | TNC MALE RIGHT ANGLE                                      | 50 OHM    |

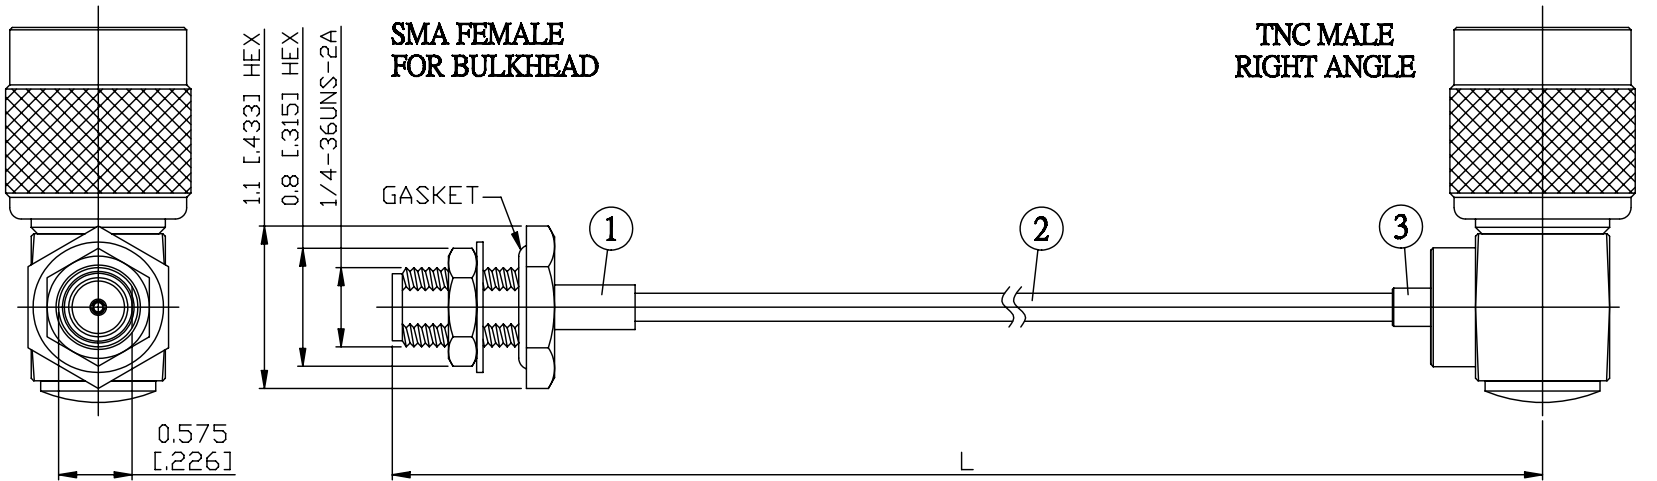

| JYE BAO P/N    | L<br>CM (INCH)         |
|----------------|------------------------|
| A85T39-85S-15  | 15 (5.906)             |
| A85T39-85S-30  | 30 (11.811)            |
| A85T39-85S-50  | 50 (19.685)            |
| A85T39-85S-100 | 100 (39.370)           |
| A85T39-85S-150 | 150 (59.055)           |
| A85T39-85S-200 | 200 (78.740)           |
| A85T39-85S-XXX | CUSTOM<br>LENGTH IN CM |



|                                                                    |                                                                     |
|--------------------------------------------------------------------|---------------------------------------------------------------------|
| LENGTH TOLERANCE<br>IS ±1.5% OR ±10MM,<br>WHICHEVER IS<br>GREATER. | <b>JYE BAO CO., LTD.</b>                                            |
|                                                                    | TAIPEI TAIWAN                                                       |
|                                                                    | DESCRIPTION CABLE ASSEMBLY SMA JACK<br>FOR BULKHEAD TO TNC PLUG R/A |
|                                                                    | JYE BAO DRAWING NO.<br>A85T39-85S-XXX                               |