


| NO. | COMPONENTS          | IMPEDANCE |
|-----|---------------------|-----------|
| 1   | N MALE              | 50 OHM    |
| 2   | 5005                | 50 OHM    |
| 3   | HEAT SHRINKING TUBE |           |
| 4   | N MALE RIGHT ANGLE  | 50 OHM    |

## TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

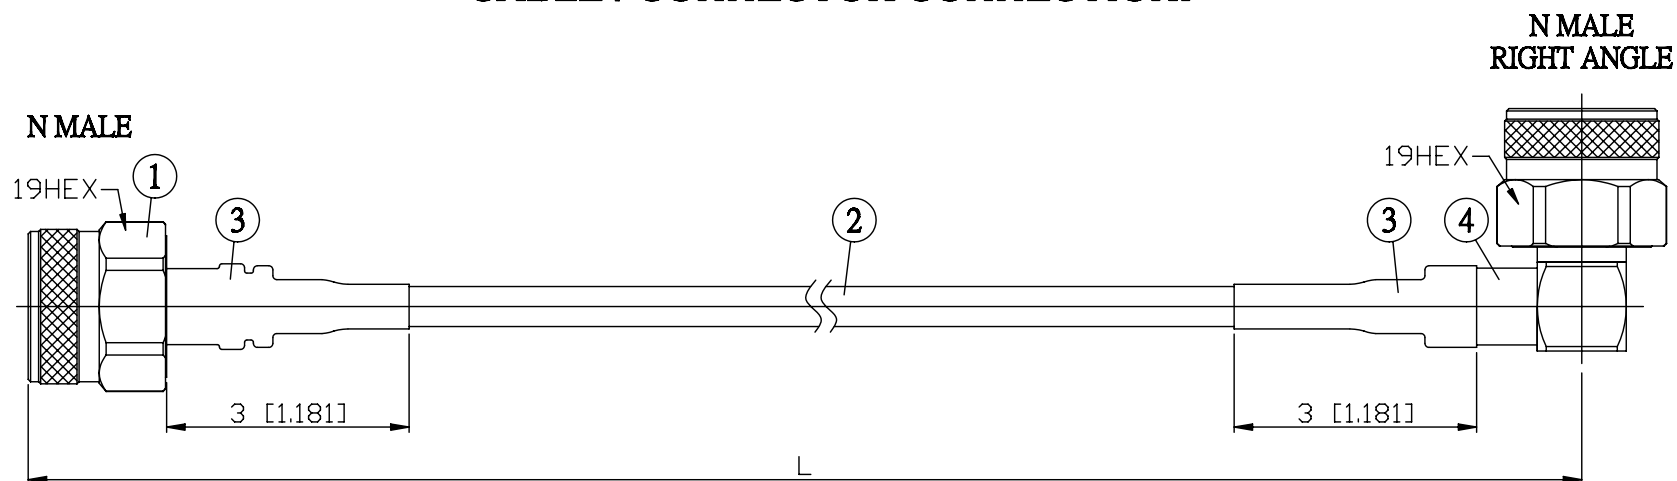

| JYE BAO P/N       | Freq.<br>(GHz) | Max.<br>Return Loss | L<br>CM (INCH)         |
|-------------------|----------------|---------------------|------------------------|
| N30N39-5005-3G50  | 3              | -20dB               | 50 (19.685)            |
| N30N39-5005-3G100 |                |                     | 100 (39.370)           |
| N30N39-5005-3G150 |                |                     | 150 (59.055)           |
| N30N39-5005-3G200 |                |                     | 200 (78.740)           |
| N30N39-5005-3GXXX |                |                     | CUSTOM<br>LENGTH IN CM |

|   |  |
|---|--|
| LENGTH TOLERANCE<br>IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ ,<br>WHICHEVER IS<br>GREATER. | <b>JYE BAO CO., LTD.</b>                           |
|   | TAIPEI TAIWAN                                      |
|   | DESCRIPTION<br>CABLE ASSEMBLY N PLUG TO N PLUG R/A |
|   | JYE BAO DRAWING NO.<br>N30N39-5005-3GXXX           |