



NO.	COMPONENTS	IMPEDANCE
1	N MALE	50 OHM
2	5005	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	50 OHM

**TEST LEAD WITH EXTRA STURDY
CABLE / CONNECTOR CONNECTION.**

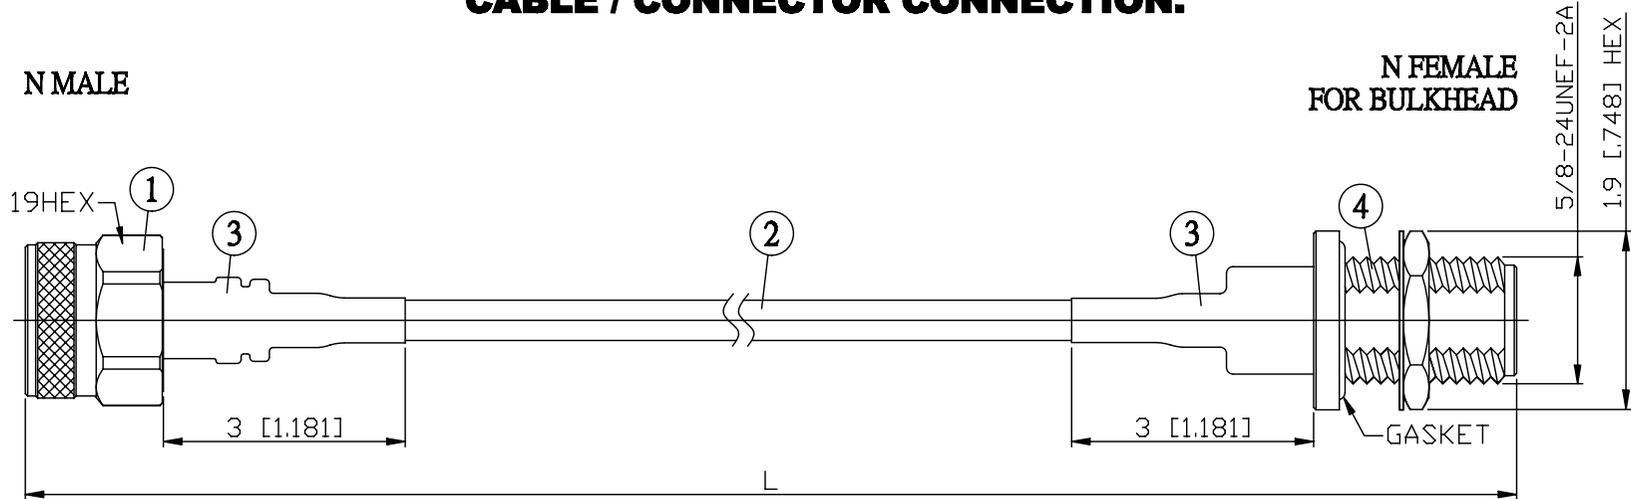

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
N30N85-5005-3G50	3	-25dB	50 (19.685)
N30N85-5005-3G100			100 (39.370)
N30N85-5005-3G150			150 (59.055)
N30N85-5005-3G200			200 (78.740)
N30N85-5005-3GXXX			CUSTOM LENGTH IN CM

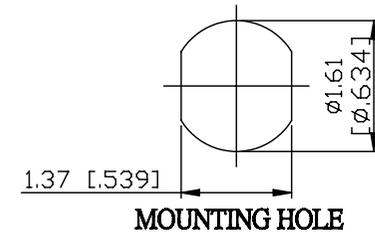

LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	JYE BAO CO., LTD.	
	TAIPEI TAIWAN	
	DESCRIPTION	CABLE ASSEMBLY N PLUG TO N JACK FOR BULKHEAD
	JYE BAO DRAWING NO.	N30N85-5005-3GXXX