


NO.	COMPONENTS	IMPEDANCE
1	N MALE	50 OHM
2	5002	50 OHM
3	HEAT SHRINKING TUBE	
4	3.5 FEMALE	50 OHM

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

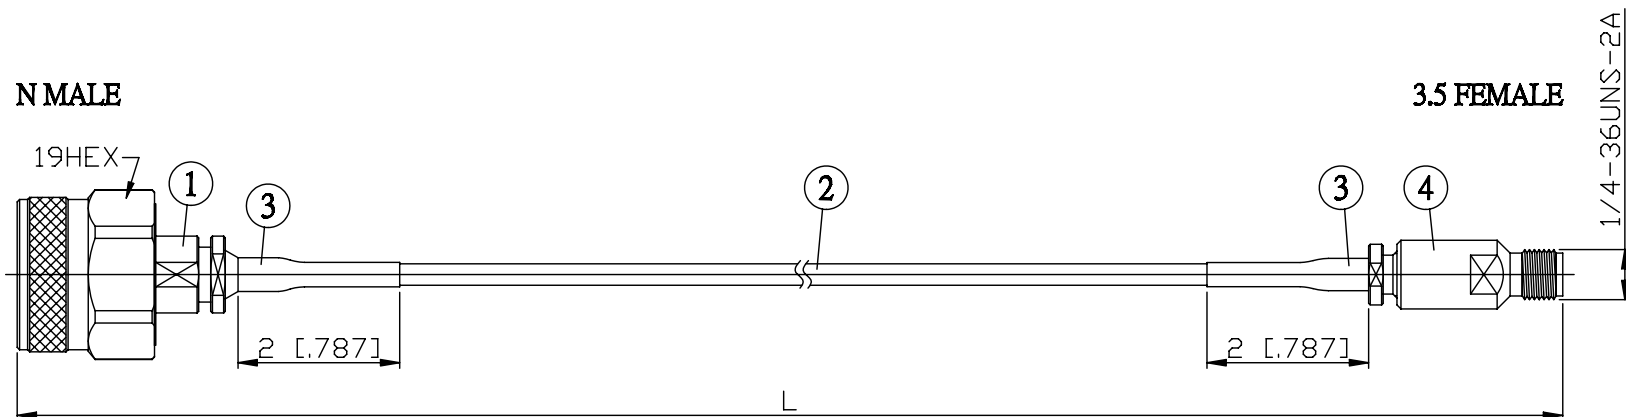

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
N30PC80-5002-18G50	18	-20dB	50 (19.685)
N30PC80-5002-18G100			100 (39.370)
N30PC80-5002-18G150			150 (59.055)
N30PC80-5002-18G200			200 (78.740)
N30PC80-5002-18GXXX			CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD.
	TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY N PLUG TO 3.5 JACK
	JYE BAO DRAWING NO. N30PC80-5002-18GXXX