



NO.	COMPONENTS	IMPEDANCE
1	N MALE RIGHT ANGLE	50 OHM
2	5005	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	50 OHM

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

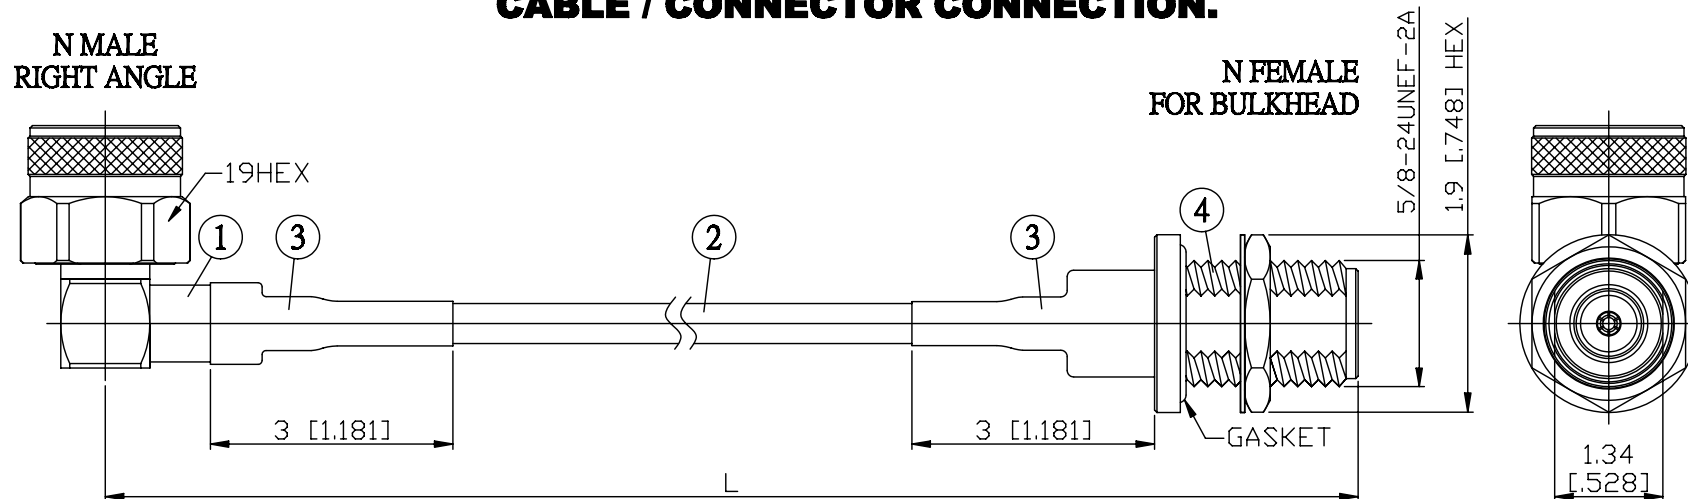

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
N39N85-5005-3G50	3	-20dB	50 (19.685)
N39N85-5005-3G100			100 (39.370)
N39N85-5005-3G150			150 (59.055)
N39N85-5005-3G200			200 (78.740)
N39N85-5005-3GXXX			CUSTOM LENGTH IN CM

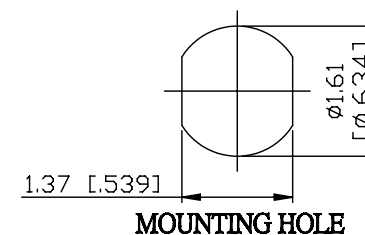

MOUNTING HOLE

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD.	
	TAIPEI TAIWAN	
	DESCRIPTION	CABLE ASSEMBLY N PLUG R/A TO N JACK FOR BULKHEAD
	JYE BAO DRAWING NO.	N39N85-5005-3GXXX