


| NO. | COMPONENTS          | IMPEDANCE |
|-----|---------------------|-----------|
| 1   | N MALE RIGHT ANGLE  | 50 OHM    |
| 2   | 5005                | 50 OHM    |
| 3   | HEAT SHRINKING TUBE |           |
| 4   | TNC MALE            | 50 OHM    |

## TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

N MALE  
RIGHT ANGLE

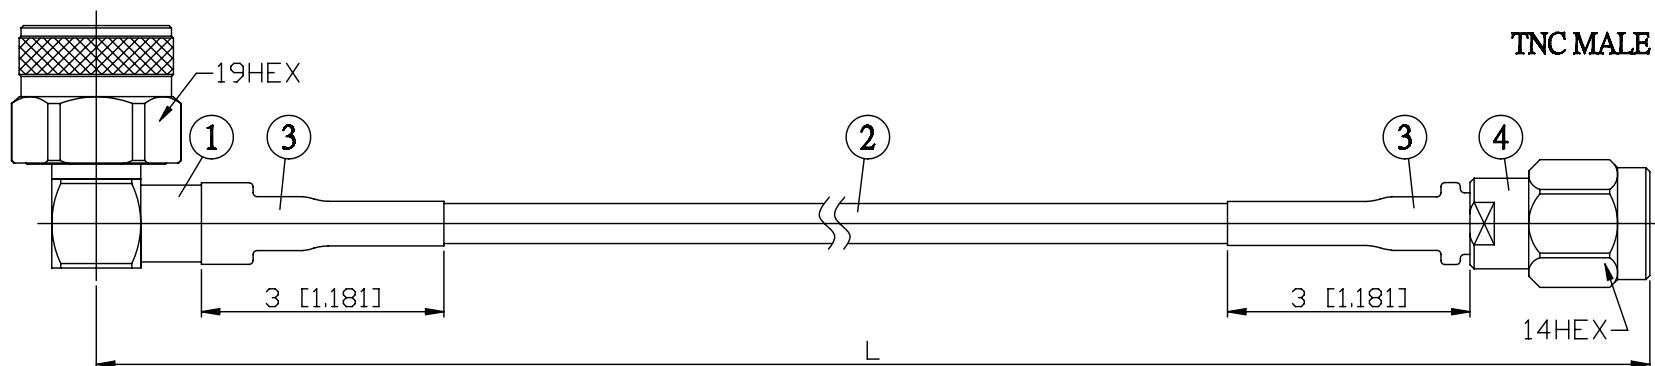

| JYE BAO P/N        | Freq.<br>(GHz) | Max.<br>Return Loss | L<br>CM (INCH)         |
|--------------------|----------------|---------------------|------------------------|
| N39T30-5005-12G50  | 12.4           | -16.5dB             | 50 (19.685)            |
| N39T30-5005-12G100 |                |                     | 100 (39.370)           |
| N39T30-5005-12G150 |                |                     | 150 (59.055)           |
| N39T30-5005-12G200 |                |                     | 200 (78.740)           |
| N39T30-5005-12GXXX |                |                     | CUSTOM<br>LENGTH IN CM |

LENGTH TOLERANCE  
IS  $\pm 1.5\%$  OR  $\pm 10\text{MM}$ ,  
WHICHEVER IS  
GREATER.

**JYE BAO CO., LTD.**  
TAIPEI TAIWAN

DESCRIPTION

CABLE ASSEMBLY N PLUG R/A TO TNC PLUG

JYE BAO DRAWING NO.

N39T30-5005-12GXXX