


NO.	COMPONENTS	IMPEDANCE
1	SMP FEMALE RIGHT ANGLE	50 OHM
2	.085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405)	50 OHM
3	SMPM FEMALE RIGHT ANGLE	50 OHM

SMP FEMALE
RIGHT ANGLE

SMPM FEMALE
RIGHT ANGLE

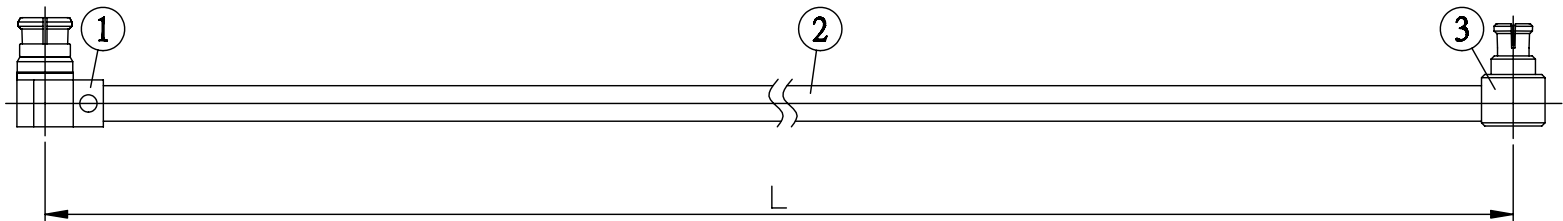

JYE BAO P/N	L CM (INCH)
P89PM89-85T-15	15 (5.906)
P89PM89-85T-30	30 (11.811)
P89PM89-85T-50	50 (19.685)
P89PM89-85T-100	100 (39.370)
P89PM89-85T-150	150 (59.055)
P89PM89-85T-200	200 (78.740)
P89PM89-85T-XXX	CUSTOM LENGTH IN CM

LENGTH TOLERANCE
IS $\pm 1.5\%$ OR $\pm 10\text{MM}$,
WHICHEVER IS
GREATER.

JYE BAO CO., LTD.
TAIPEI TAIWAN

DESCRIPTION
CABLE ASSEMBLY SMP JACK R/A TO SMPM JACK R/A
JYE BAO DRAWING NO.
P89PM89-85T-XXX