


NO.	COMPONENTS	IMPEDANCE
1	PC3.5 MALE	50 OHM
2	5005	50 OHM
3	HEAT SHRINKING TUBE	
4	PC3.5 FEMALE	50 OHM

**TEST LEAD WITH EXTRA STURDY
CABLE / CONNECTOR CONNECTION.**

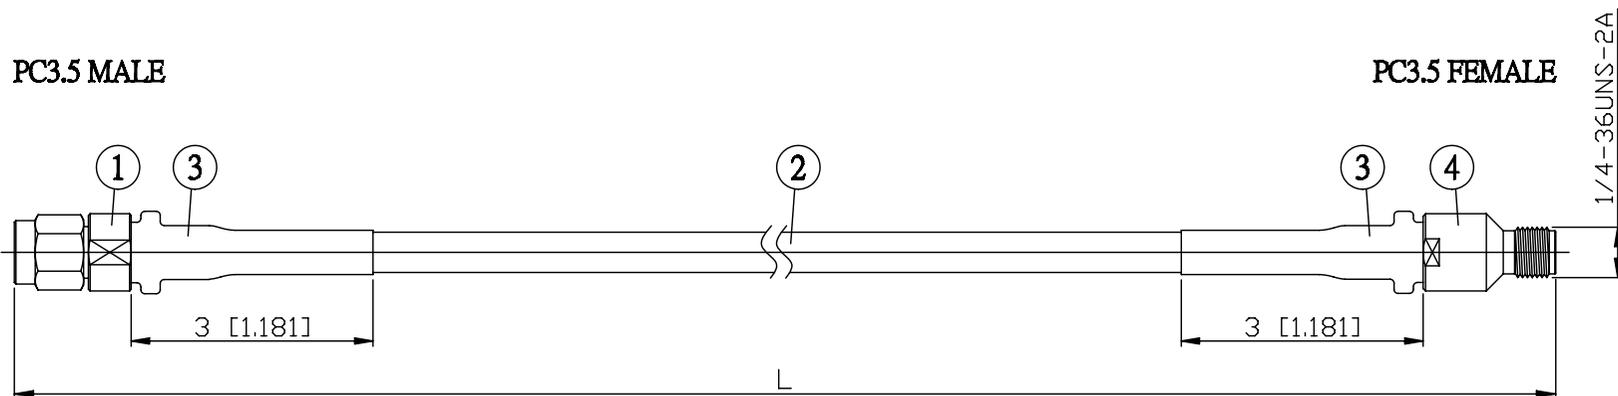

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
PC30PC80-5005-29G50	29	-17dB	50 (19.685)
PC30PC80-5005-29G100			100 (39.370)
PC30PC80-5005-29G150			150 (59.055)
PC30PC80-5005-29G200			200 (78.740)
PC30PC80-5005-29GXXX			CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD. TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY PC3.5 PLUG TO PC3.5 JACK
	JYE BAO DRAWING NO. PC30PC80-5005-29GXXX