


| NO. | COMPONENTS | IMPEDANCE |
|-----|--|-----------|
| 1 | SMPM FEMALE | 50 OHM |
| 2 | .085" HANDBENDABLE CABLE (= JYBAO P/N .085SRF-W-P-50) | 50 OHM |
| 3 | SMPM FEMALE RIGHT ANGLE | 50 OHM |

SMPM FEMALE

SMPM FEMALE
RIGHT ANGLE

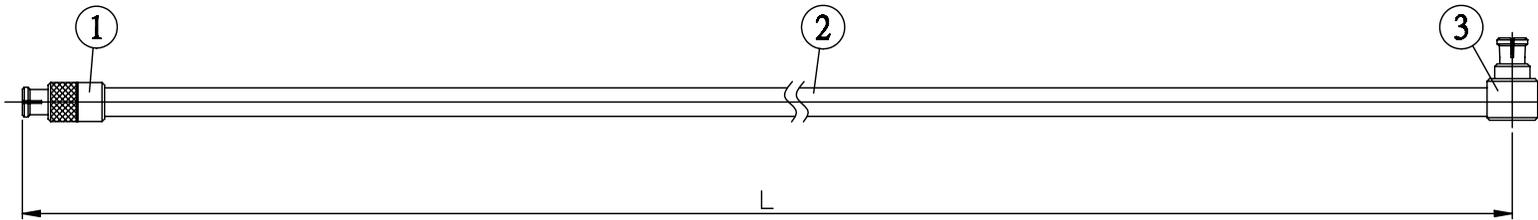

| JYE BAO P/N | L CM (INCH) |
|------------------|------------------------|
| PM80PM89-85S-15 | 15 (5.906) |
| PM80PM89-85S-30 | 30 (11.811) |
| PM80PM89-85S-50 | 50 (19.685) |
| PM80PM89-85S-100 | 100 (39.370) |
| PM80PM89-85S-150 | 150 (59.055) |
| PM80PM89-85S-200 | 200 (78.740) |
| PM80PM89-85S-XXX | CUSTOM LENGTH IN CM |

LENGTH TOLERANCE
IS $\pm 1.5\%$ OR $\pm 10\text{MM}$,
WHICHEVER IS
GREATER.

JYE BAO CO., LTD.

TAIPEI TAIWAN

DESCRIPTION

CABLE ASSEMBLY SMPM JACK TO SMPM JACK R/A

JYE BAO DRAWING NO.

PM80PM89-85S-XXX