



| NO. | COMPONENTS                               | IMPEDANCE |
|-----|------------------------------------------|-----------|
| 1   | SMA REVERSE POLARITY FEMALE FOR BULKHEAD | 50 OHM    |
| 2   | RG316                                    | 50 OHM    |
| 3   | HEAT SHRINKING TUBE                      |           |
| 4   | SMB MALE RIGHT ANGLE                     | 50 OHM    |

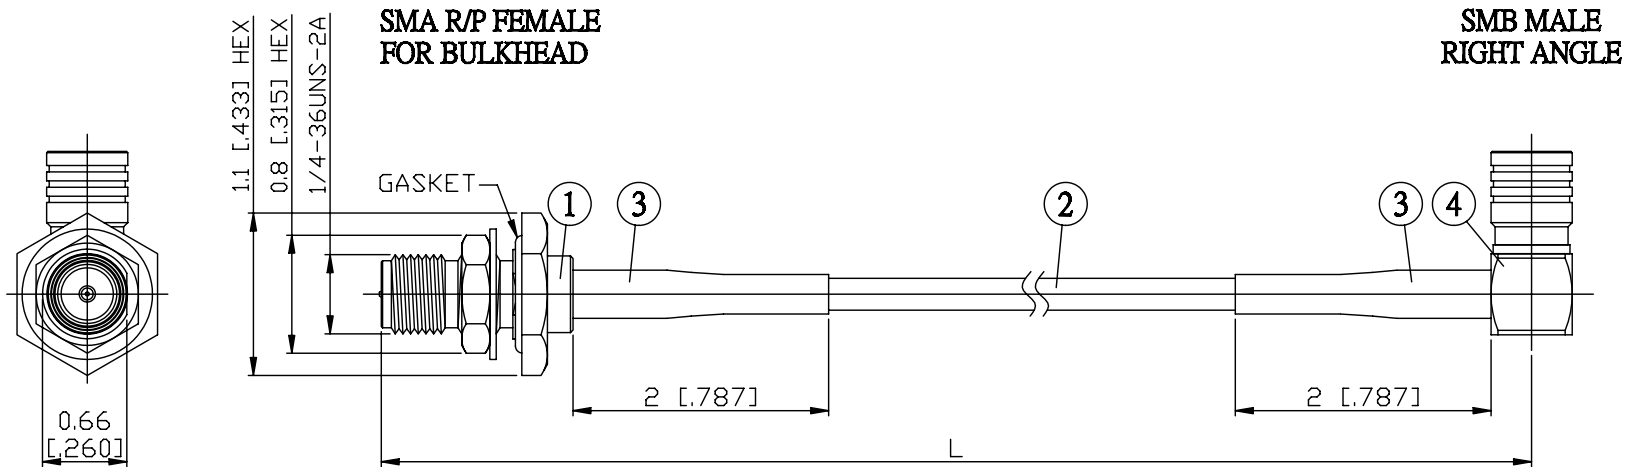

| JYE BAO P/N    | L<br>CM (INCH)         |
|----------------|------------------------|
| A95S39-316-15  | 15 (5.906)             |
| A95S39-316-30  | 30 (11.811)            |
| A95S39-316-50  | 50 (19.685)            |
| A95S39-316-100 | 100 (39.370)           |
| A95S39-316-150 | 150 (59.055)           |
| A95S39-316-200 | 200 (78.740)           |
| A95S39-316-XXX | CUSTOM<br>LENGTH IN CM |



**LENGTH TOLERANCE  
IS  $\pm 1.5\%$  OR  $\pm 10\text{MM}$ ,  
WHICHEVER IS  
GREATER.**

**JYE BAO CO., LTD.**

TAIPEI TAIWAN

|             |                                                             |
|-------------|-------------------------------------------------------------|
| DESCRIPTION | CABLE ASSEMBLY SMA R/P JACK<br>FOR BULKHEAD TO SMB PLUG R/A |
|-------------|-------------------------------------------------------------|

**JYE BAO DRAWING NO.**

**A95S39-316-XXX**